


REMOTE CONTINUOUS-SPRAY, RMN NOZZLE

HOW TO ORDER SHEET

Choose from three different angled remote tips for versatility in any, high temperature, continuous spray, design application. These nozzles feature 1/4-20 tapped (#10 screw clearance) mounting holes and durable, aluminum or stainless steel construction. The **Low Profile** nozzle provides a unique space saving design.

Part Number

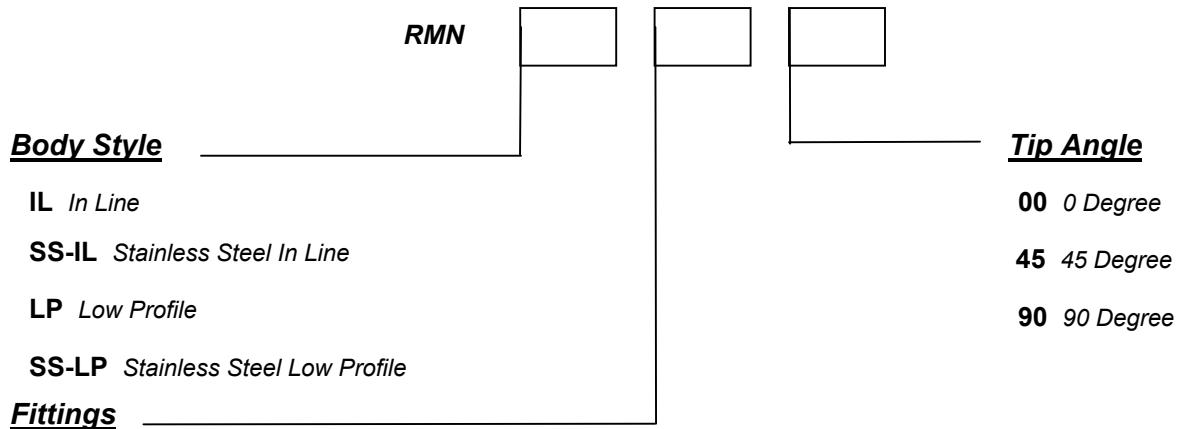

Oil Lines: Nylon: 3/16" O.D. Tubing Steel Tube: 1/8" O.D. Tubing

Air Lines: Nylon: 1/4" O.D. Tubing Steel Tube: 1/4" O.D. Tubing

NC Nylon Compression Ftg. - **Standard**

NY Nylon Push In Tube Ftg.

CS Carbon Steel Ftg. (Steel Tubing)


SS Stainless Steel Ftg. (Steel Tubing)

X No Fittings

**Low Profile
Nozzle Body**

Customer to supply
1/8" O.D. steel tubing.

**Note: Length not to
exceed 10 ft. from
nozzle body to remote
tip.

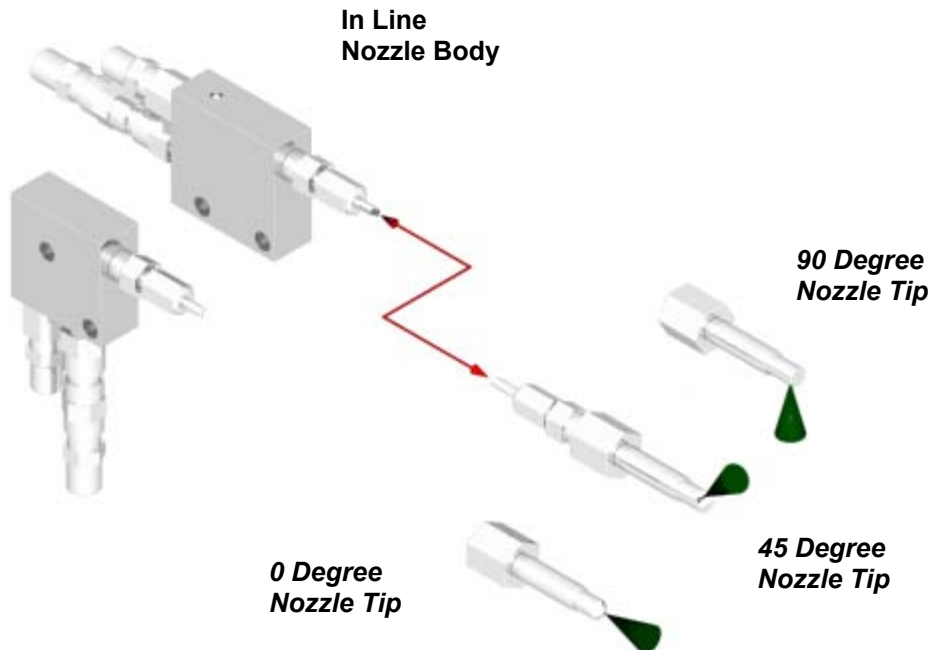


Specifications:

Min./Max. temperature range: -15°F to 250°F (10°C to 121°C)
 Fluid Type: Oil
 Recommended viscosity range: 100SUS – 2000SUS (20cst – 440cst)
 Seal Material: Viton
 Check Ball material: Viton
 Standard Oil Line size: Nylon: 3/16" Dia.
 Steel: 1/8" Dia.
 Standard Air Line size: Nylon/Steel 1/4" Dia.

Applications:

High Temperature Applications

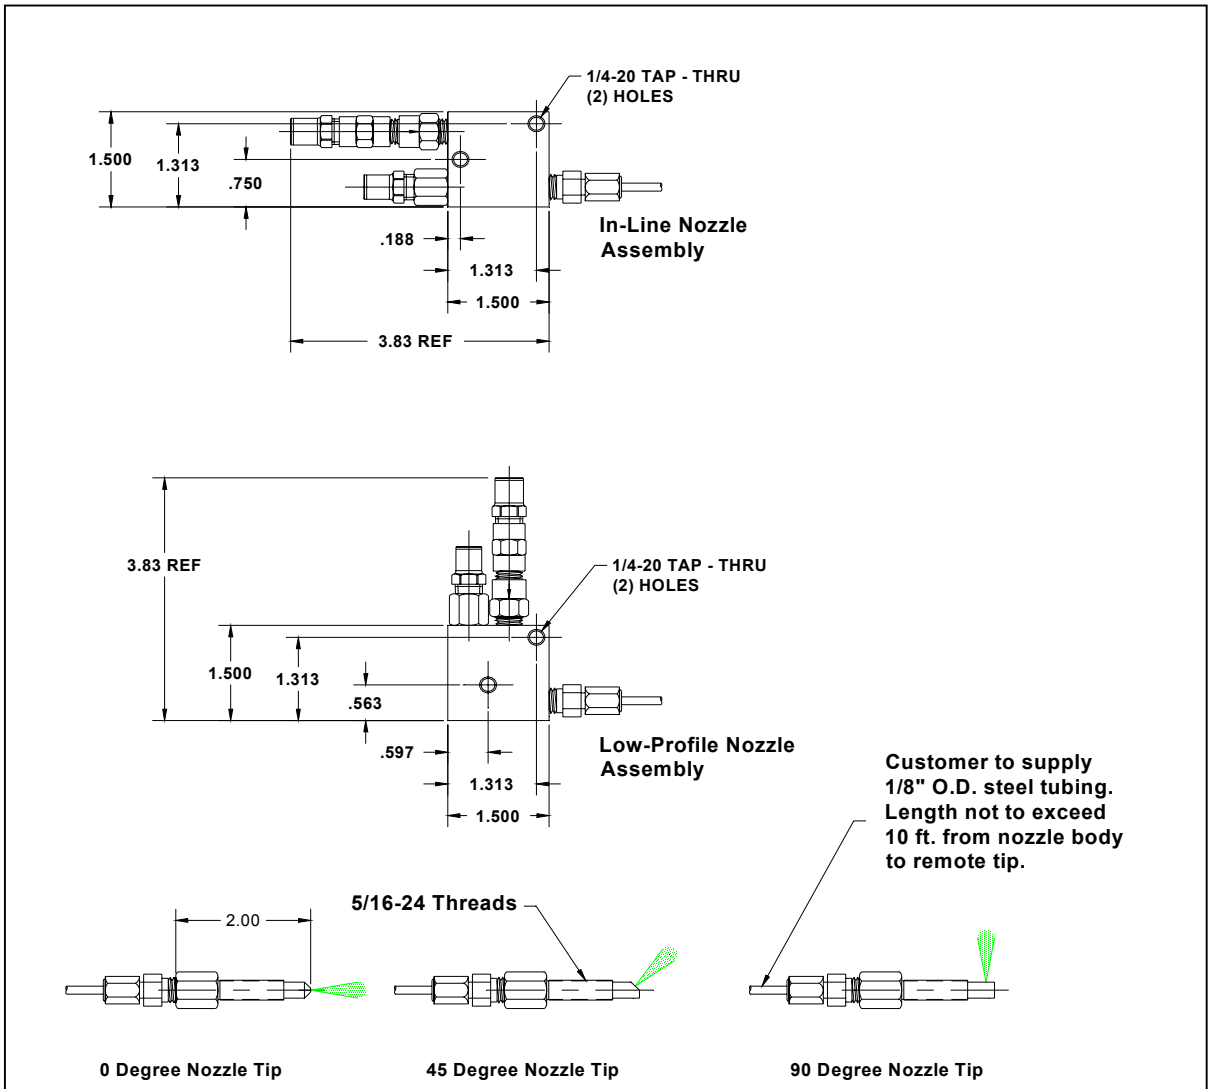

Replacement Nozzle Tip Part Numbers:

Spray Angle	Nozzle Tip Part Number
0°	RMT-00
45°	RMT-45
90°	RMT-90