


## CONTINUOUS-SPRAY, STN NOZZLE HOW TO ORDER SHEET

Choose from three different styled tips for versatility in any, continuous spray, design application. These nozzles feature 1/4-20 tapped (#10 screw clearance) mounting holes and durable, aluminum construction. The **Low Profile** nozzle provides a unique space saving design.

**Part Number**

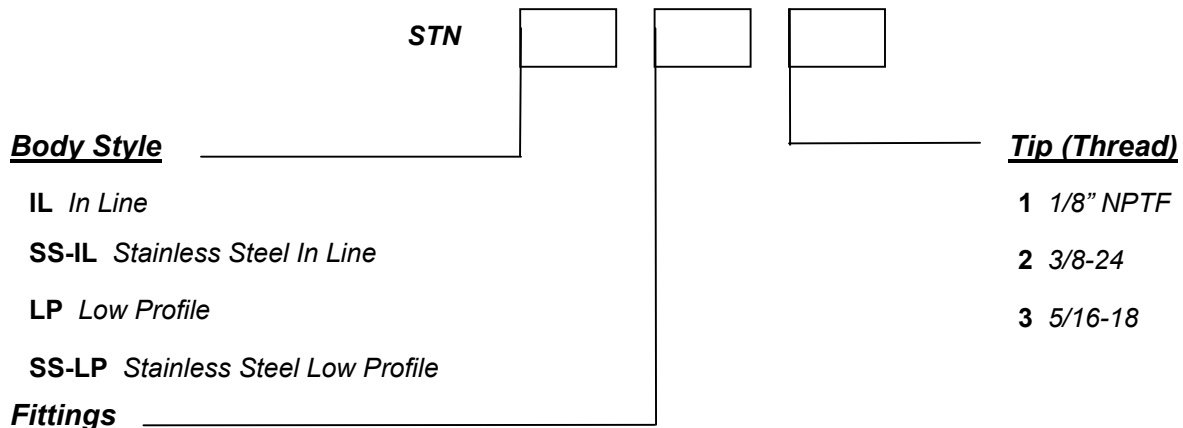

**Oil Lines:** Nylon: 3/16" O.D. Tubing    Steel Tube: 1/8" O.D. Tubing

**Air Lines:** Nylon: 1/4" O.D. Tubing    Steel Tube: 1/4" O.D. Tubing


**NC** Nylon Compression Ftg. - **Standard**

**NY** Nylon Push In Tube Ftg.

**CS** Carbon Steel Ftg. (Steel Tubing)

**SS** Stainless Steel Ftg. (Steel Tubing)

**X** No Fittings

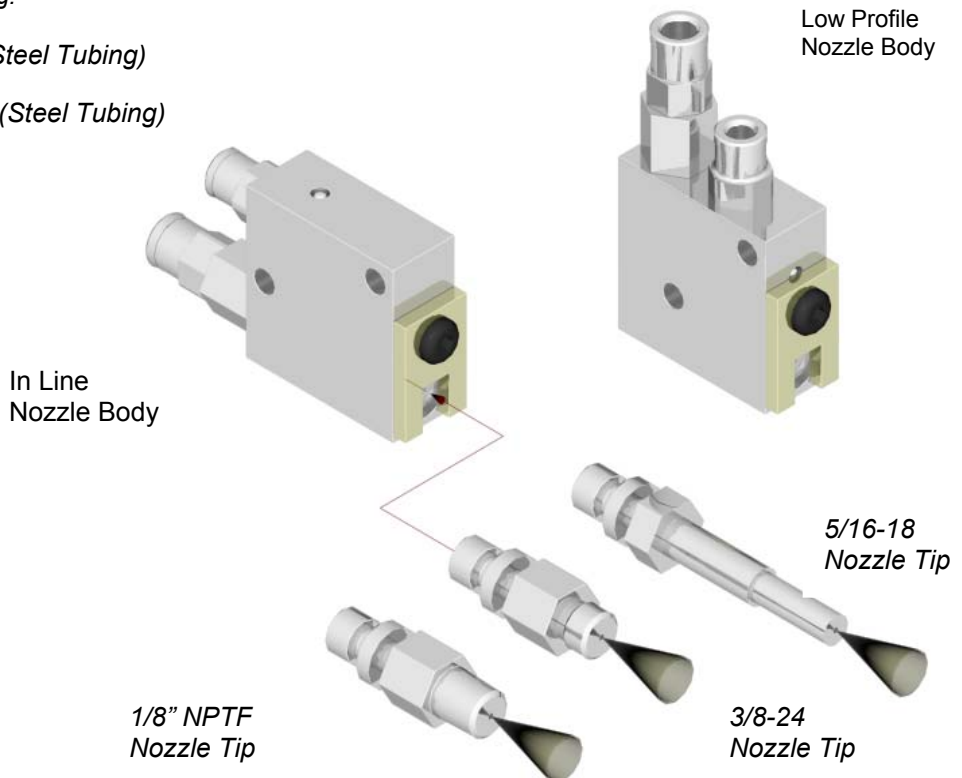


**Specifications:**

Min./Max. temperature range: -15°F to 250°F (10°C to 121°C)  
 Fluid Type: Oil  
 Recommended viscosity range: 100SUS – 2000SUS (20cst – 440cst)  
 Seal Material: Viton  
 Check Ball material: Viton  
 Standard Oil Line size: Nylon: 3/16" Dia.  
 Steel: 1/8" Dia.  
 Standard Air Line size: Nylon/Steel 1/4" Dia.

**Applications:**

Tenterframes

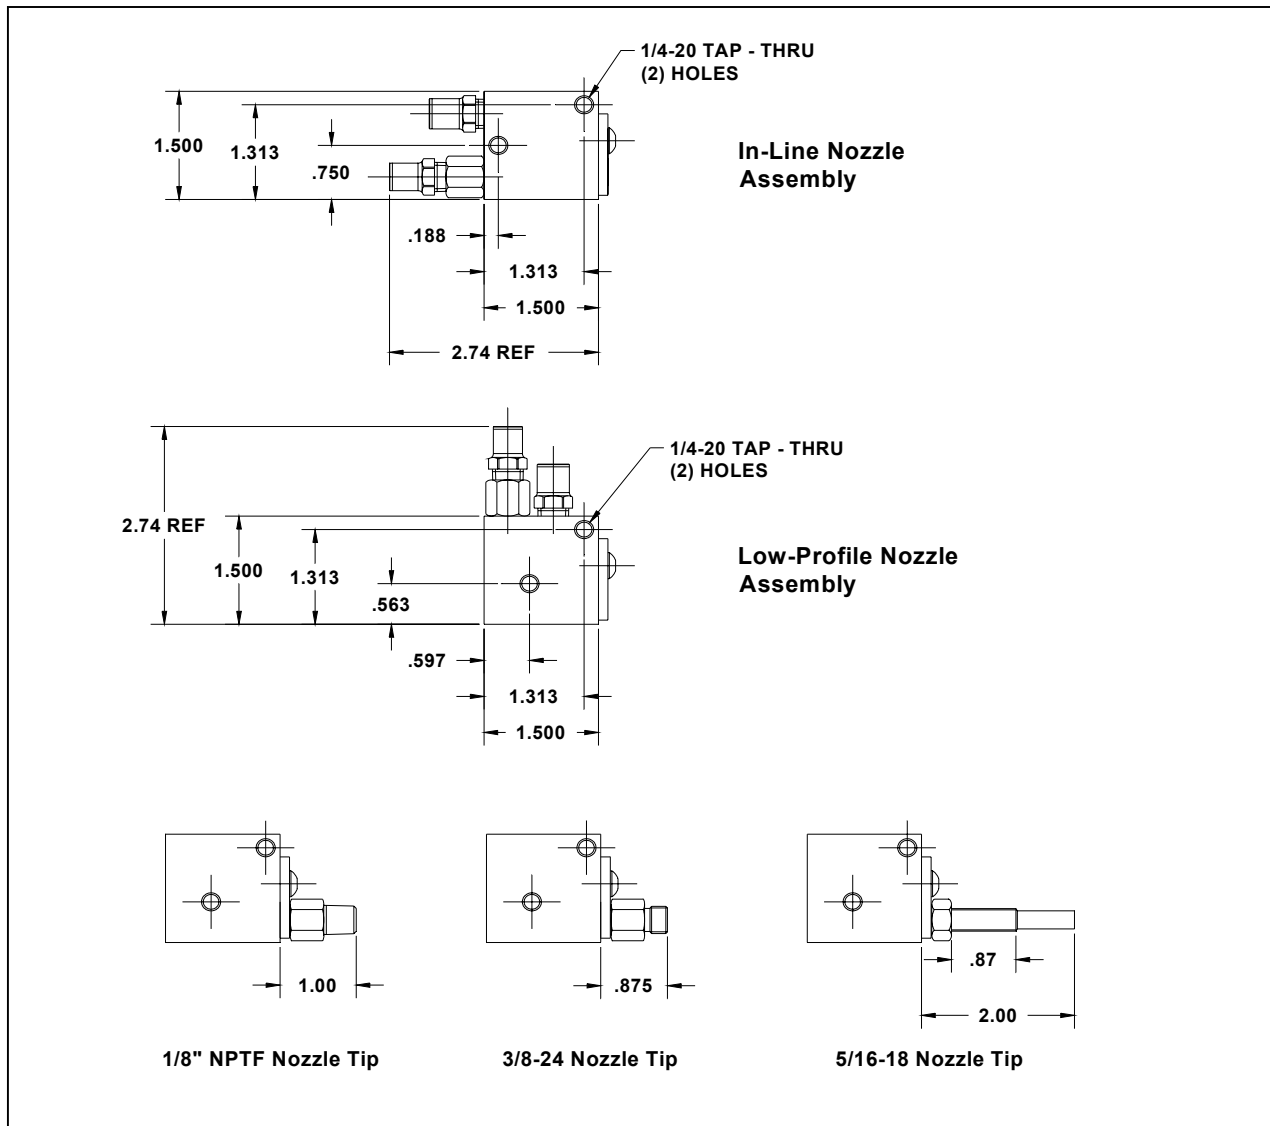

**Replacement Nozzle Tip Part Numbers:**

Tip Thread	Nozzle Tip Part Number
1/8" NPT	STT-1
3/8-24 SAE	STT-2
5/16-18 SAE	STT-3